

C 62

www.hermle.de



Milling at its best: Hermle machines are often at the forefront when it comes to optimized results. The proverbial Hermle precision in conjunction with process consultation and project management has made us an important machine manufacturer in nearly all key sectors: from large complex components to the smallest components in the high-tech area. Versatile applications, uncompromising results – Hermle “The Original”.



Contents.

01 Industry sectors	4
02 The machine	6
03 Technical data	31
04 Automation	38
05 Precision	42
06 Energy efficiency	44
07 Services	46

01 Industry sectors

Hermle is at home in all sectors. For us, ensuring the highest precision and reliable machining is always paramount. Our machines are made for daily operation, whether as linked linear segments in production or as stand-alone workshop machinery.

Aerospace industry



Machine construction



Motor sports and racing



Tool and mould construction



Subcontractor industry



02

The machine

The C 62: a highly dynamic machining centre designed consistently for 5-axis/5-side machining.

Features galore to ensure high-precision, economical parts production. Numerous automation solutions extend the application range many times over.

TECHNICAL DATA

<i>Traverse X-Y-Z:</i>	<i>1200 – 1300 – 900 mm</i>
<i>Speed:</i>	<i>9000 / 10000 / 12000 / 15000 / 18000 rpm</i>
<i>Rapid linear traverses X-Y-Z:</i>	<i>50 m/min</i>
<i>Linear acceleration X-Y-Z:</i>	<i>6 m/s²</i>
<i>Control unit:</i>	<i>TNC 640 / S 840 D sl</i>
<i>NC swivelling rotary tables:</i>	
<i>Table with torque:</i>	<i>Ø 900 mm</i>
<i>Swivelling range:</i>	<i>+/- 130°</i>
<i>A-axis speed:</i>	<i>15 rpm</i>
<i>C-axis speed:</i>	<i>30 rpm</i>
<i>Max. table load:</i>	<i>2500 kg</i>
<i>Table with torque:</i>	<i>Ø 1350 x 1100 mm</i>
<i>Swivelling range:</i>	<i>+ / - 130°</i>
<i>A-axis speed:</i>	<i>15 rpm</i>
<i>C-axis speed:</i>	<i>30 rpm</i>
<i>Max. table load:</i>	<i>2500 kg</i>





02.1

The machine . MT



Combines highly dynamic milling/turning simultaneously in up to 5 axes: thanks to the revolutionary MT design, all turning operations can be performed even with the table swivelled. The C 62 U MT machining centre can also process workpieces up to 2500 kg in weight.

TECHNICAL DATA

Traverse X-Y-Z: 1200 – 1300 – 900 mm

Speed: 12000 / 18000 rpm

Rapid linear traverses X-Y-Z: 50 m/min

Linear acceleration X-Y-Z: 6 m/s²

Control unit: TNC 640 / S 840 D sl

NC swivelling rotary table:

Table with torque: Ø 1200 mm

Swivelling range: +/- 130°

A-axis speed: 15 rpm


C-axis speed: 400 rpm

Max. turning table load: 1500 kg

Max. milling table load: 2500 kg

- Fully integrated rotary technology
- Integrated balancing system
- Reinforced cabin roof
- Milling operations: 5-side machining/
up to 5 axes simultaneous machinings
- Turning operations: Horizontal/vertical turning,
up to 5 axes simultaneous machinings



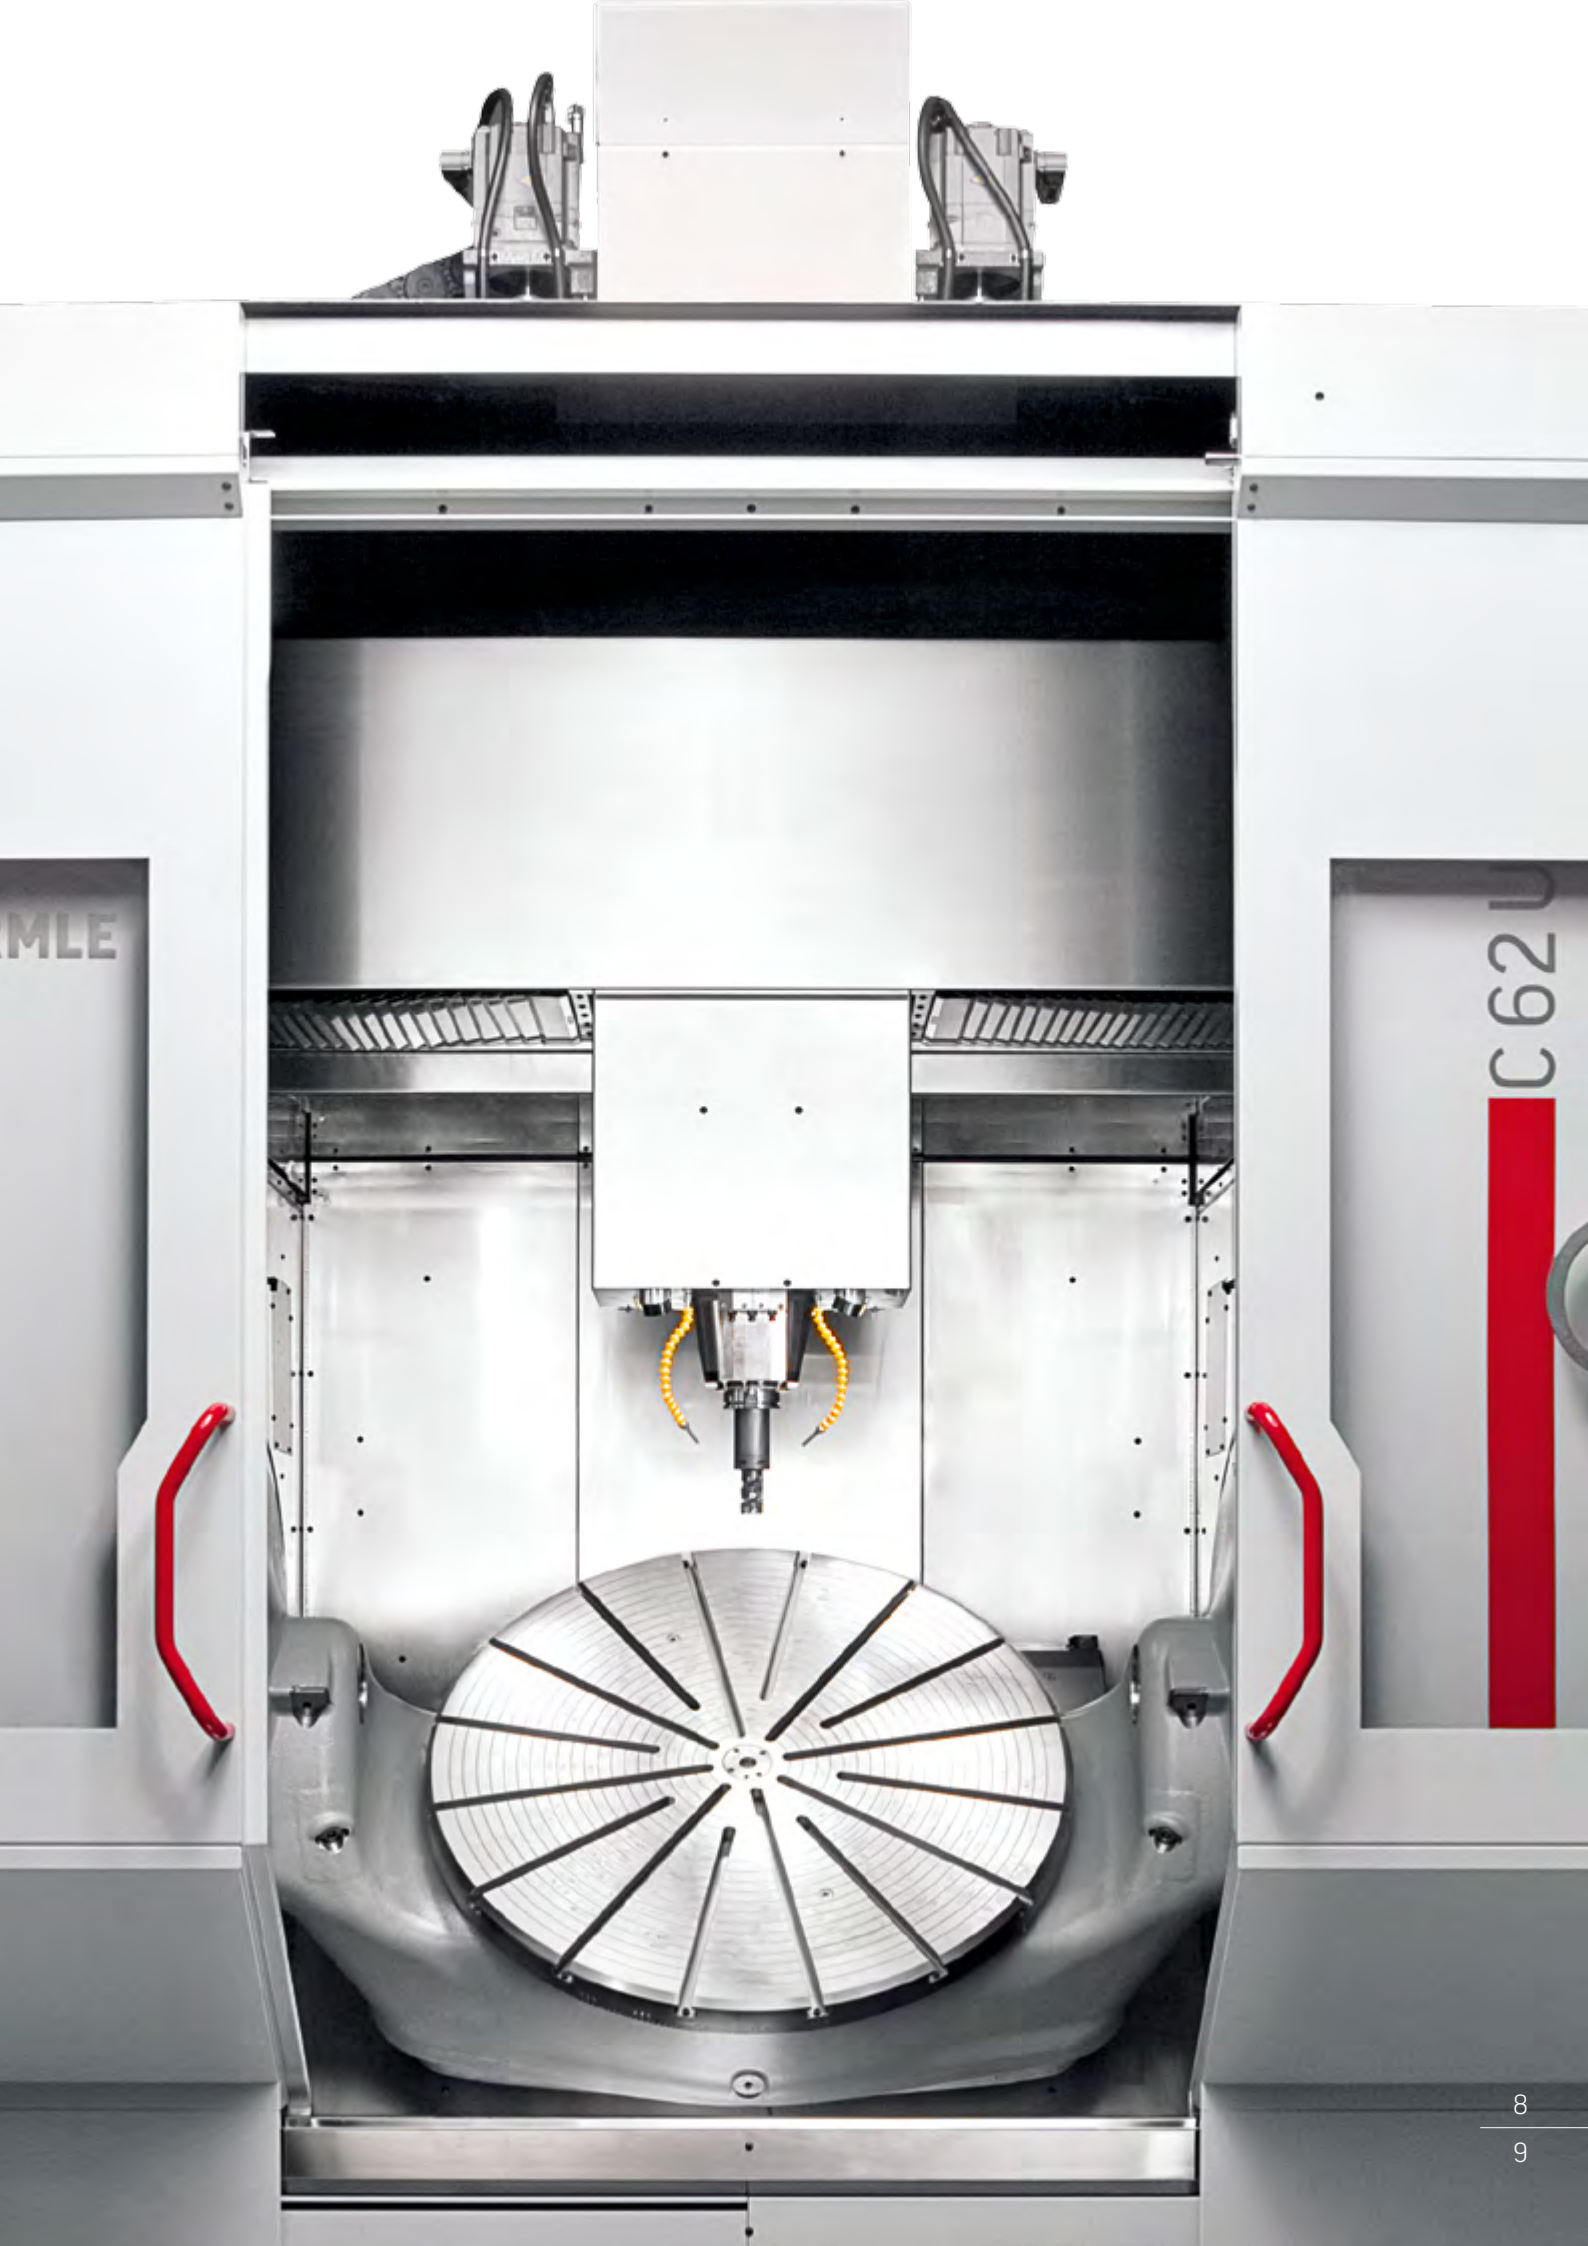



MLE

C 620

02.2

A new dimension of dynamics

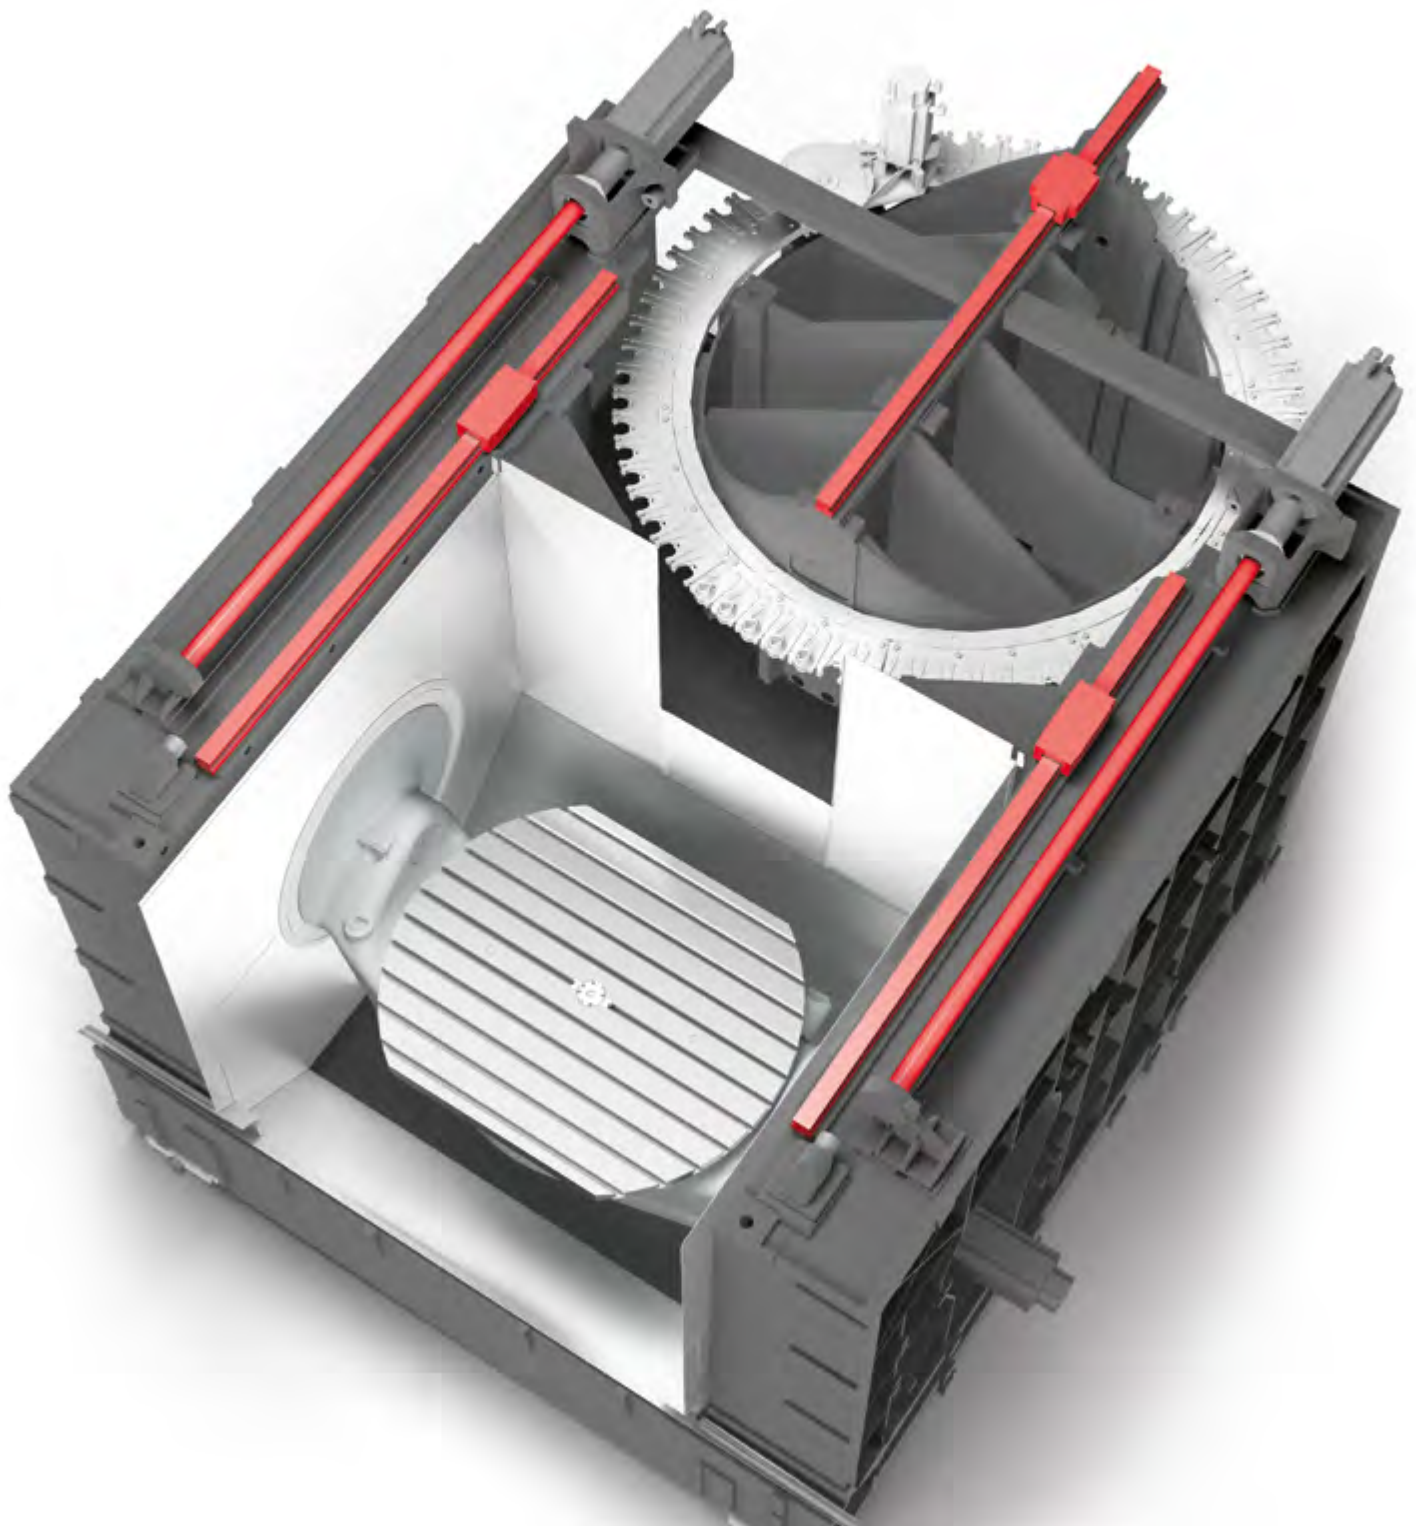

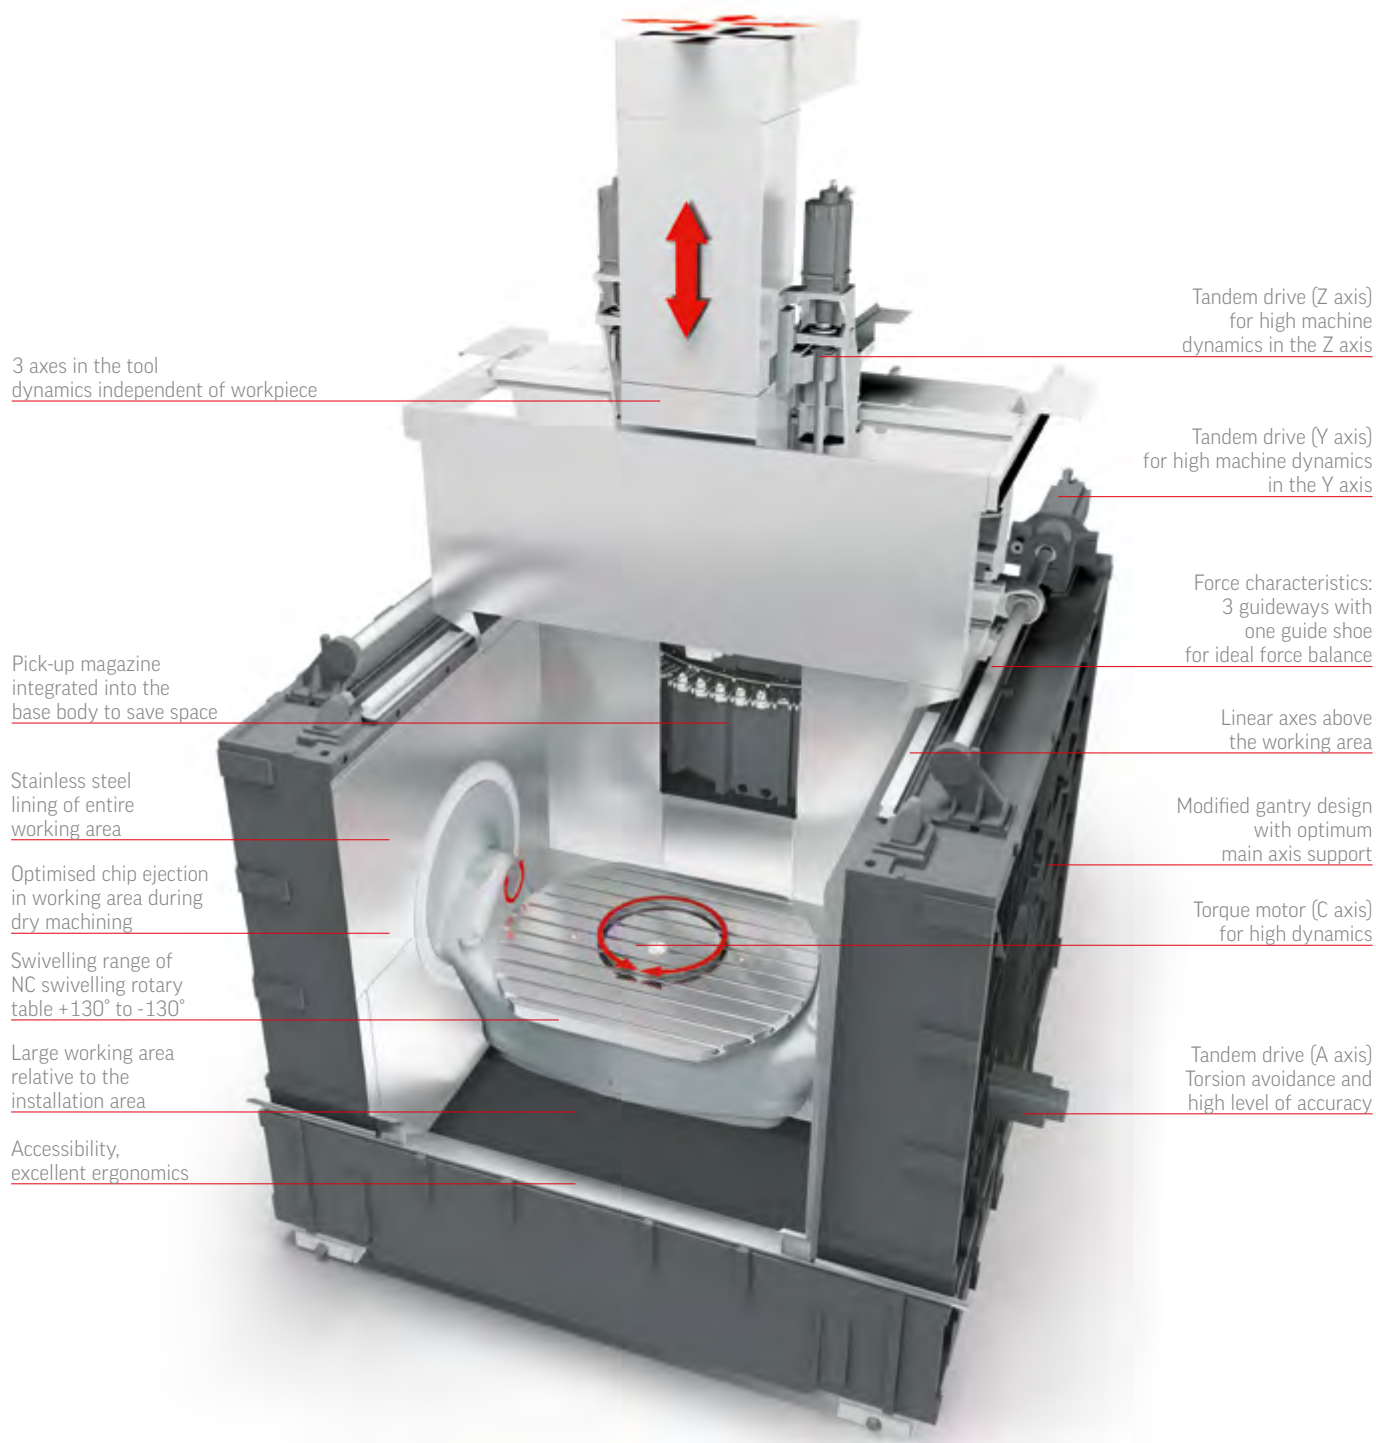

02.3


The workpiece

Many important points must be observed in order to guarantee that every workpiece is machined perfectly. For this reason, Hermle has been working on perfecting and optimising the machining process for many years. This is the reason that the C 62 is now equipped with:

- The largest working area relative to the installation area
- The largest swivelling range of workpieces in the working area
- Utilisation of the entire traverse range
- A large collision circle between the table flanges

THE WORKPIECE DIMENSION

- *Unhindered crane loading from directly above the table centre*
- *When loading the crane the spindle moves to the magazine – this means the working area is completely clear and accessible*
- *Extensive automation solutions for optimum workpiece handling*



5-axis/MT

Ø 1200 x 900 mm

max. 2500 kg

MT: max. 1500 / 2500 kg

Collision circle: Ø 1400 mm



5-axis machining

02.4

Ergonomics

Built for daily use: the Hermle C 62 can be ergonomically adapted for every machine operator for optimum ease of use, simple operation and uncomplicated maintenance.

HIGHLIGHTS

- Ergonomic control panel
 - Adjustable height +/- 100 mm
 - Tilting screen 0 - 30°
 - 19" screen
- Automatic and reinforced cabin top
- Laminated safety glass panes
- Optimum loading height
- Crane loading
- Minimum interval between table and operator
- Large door opening
- Additional control panel in area of tool loading station
- Lockable fluid box
- Production cabin and bed flushing


Screen pivotable
by up to 30°




Practical,
slide-in storage



Control panel
+/-100 mm
height adjustable

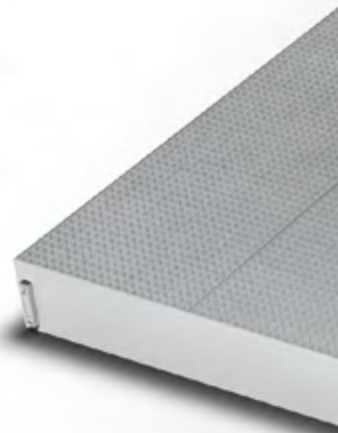

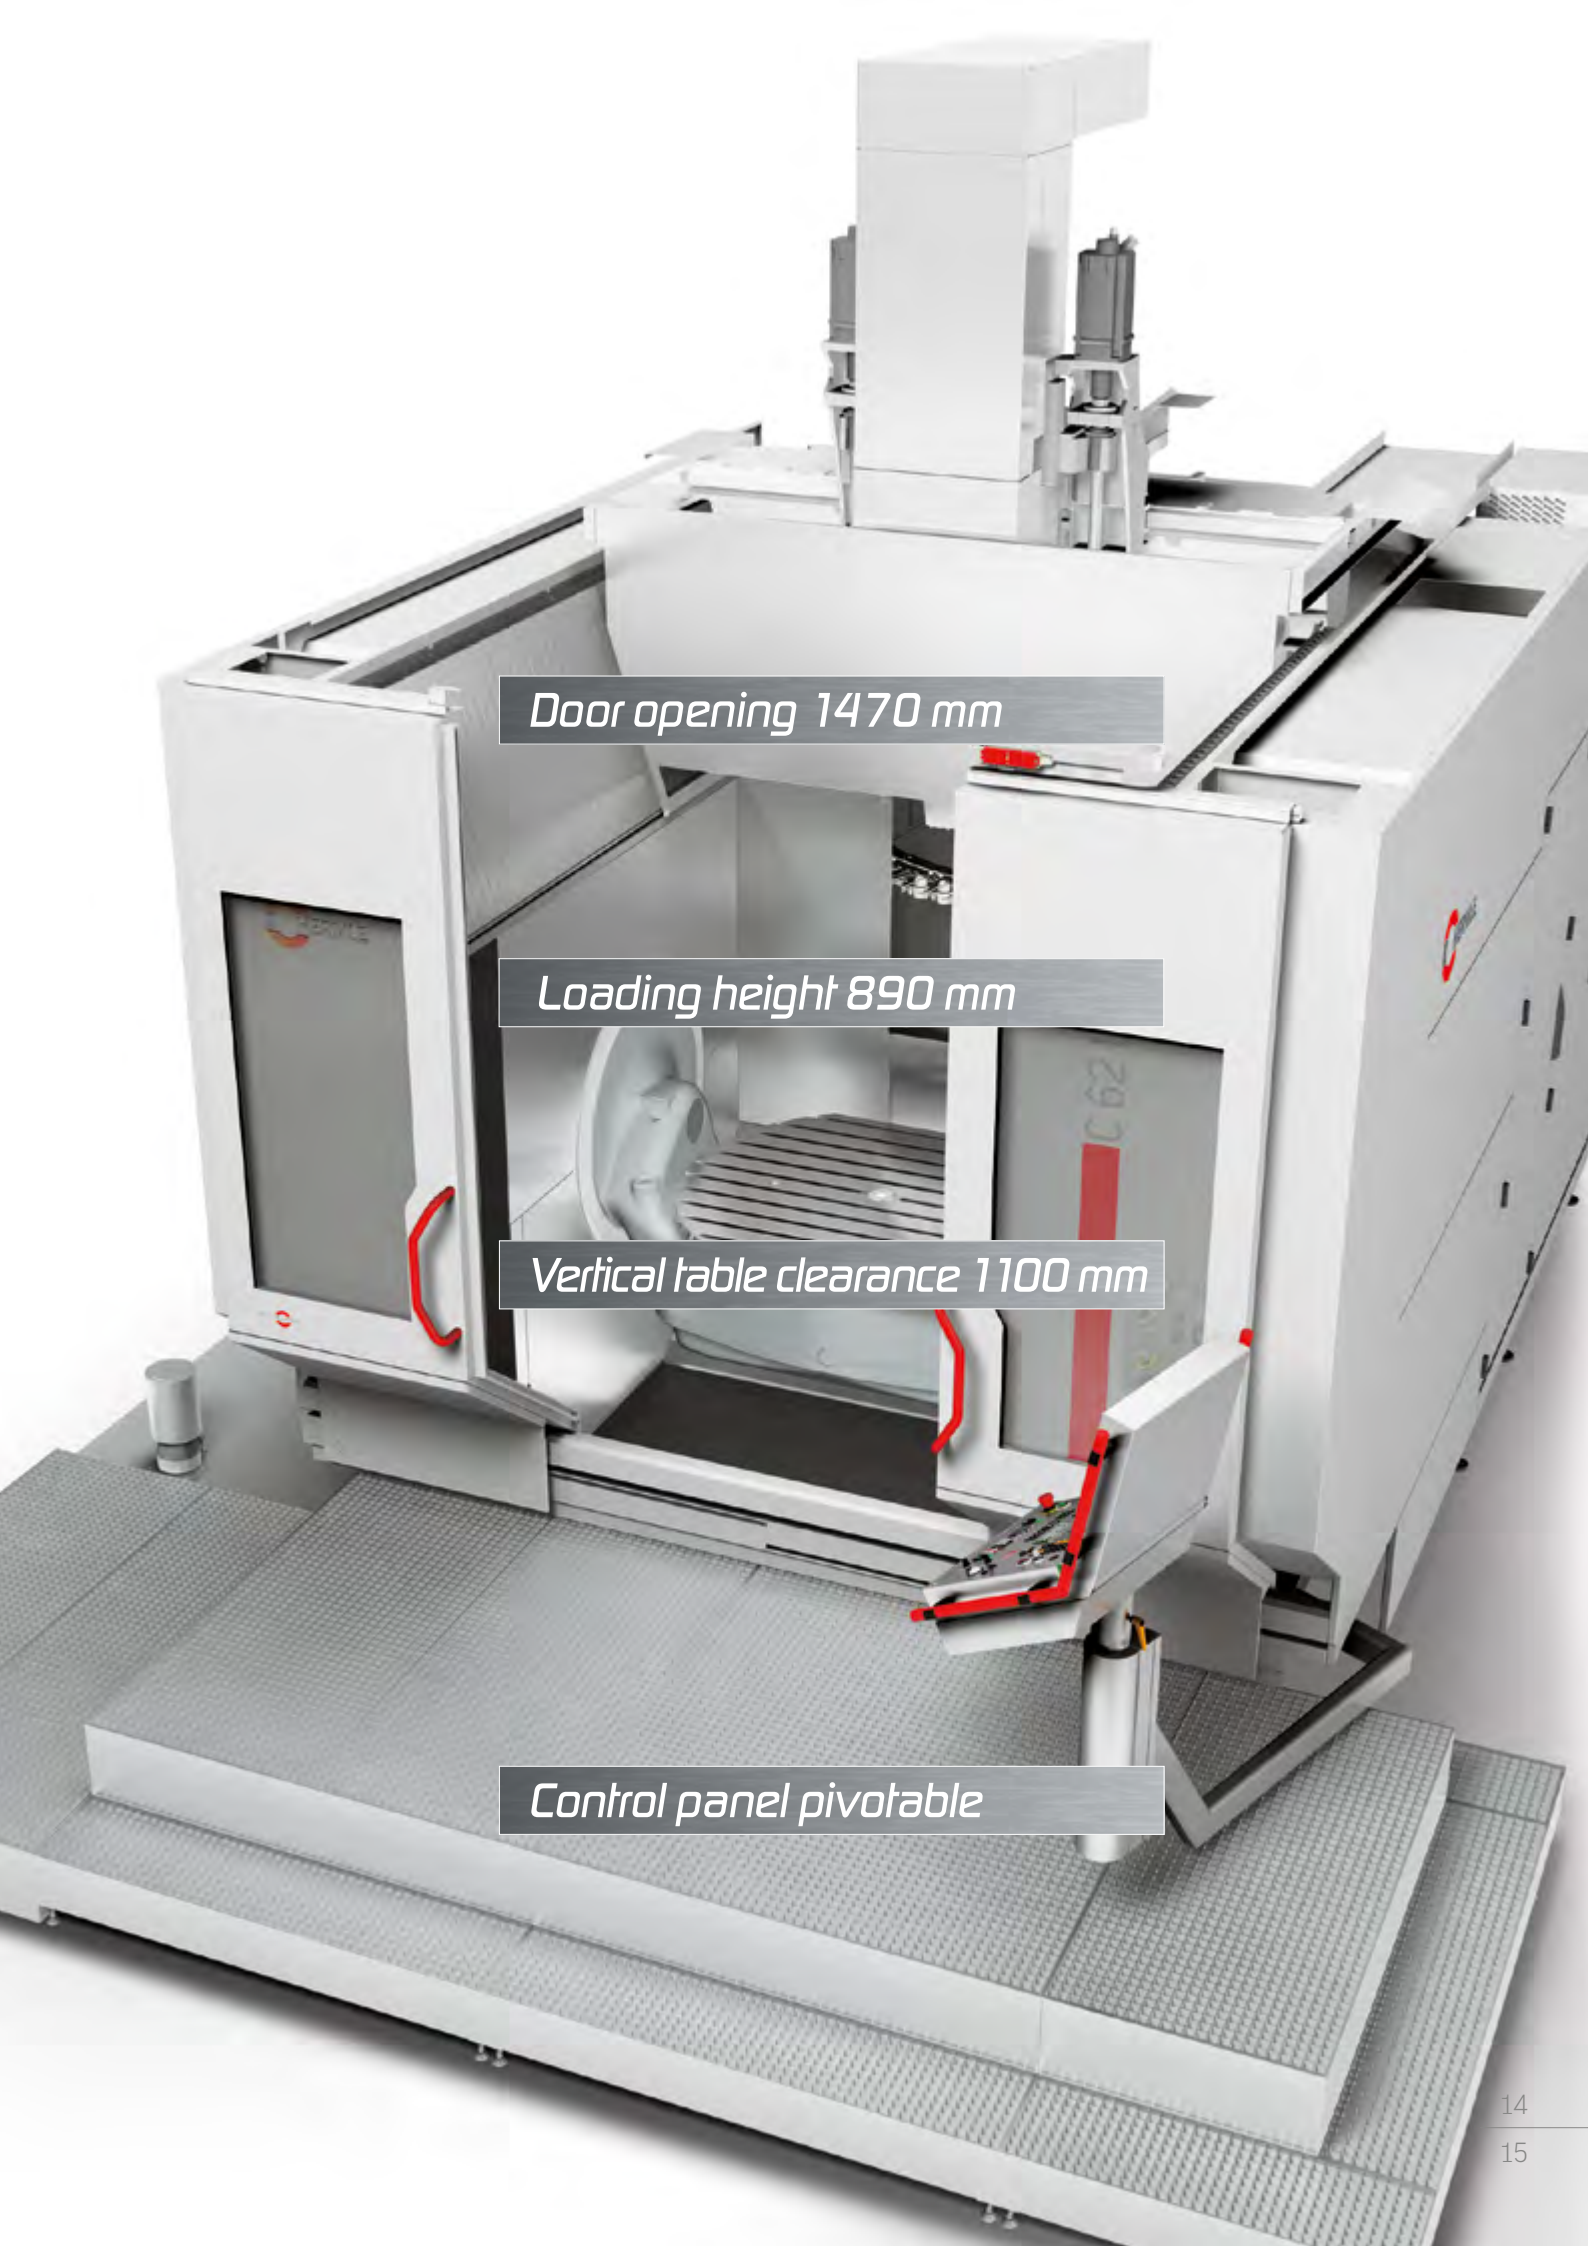

Door opening 1470 mm

Loading height 890 mm

Vertical table clearance 1100 mm

Control panel pivotable

02.5

Table variants

Hermle's NC swivelling rotary table has revolutionised the concept of 5-axis machining. Also with the C 62, five axis operation is a key attribute, this capability is enhanced through the use of a torque drive. All tables are manufactured exclusively and entirely at our plant in Gosheim.

Uncompromised perfection: this tandem drive design accesses the gearwheel on the table housing directly and so completely eliminates shaft torsion. This is the only way to achieve the highest precision.

Made in Germany – made in Gosheim: the C 62 table variants stand for the highest quality and optimum material usage from the cast housing to the installed torque motors. At our main plant in Gosheim, these tables are laying the foundations for the precision, accuracy and quality of the machined surfaces.



Hermle tables are equipped with cutting edge drive technology for high dynamic performance during 5 axis machining, as it is the slowest axis that determines the speed when milling in 5 axes. High-torque motors and the adapted gear can position loads of up to 2500 kg rapidly and, most importantly, with exceptional precision.

TECHNICAL DATA

High degree of freedom in working area

- *Very high table load (up to 2500 kg with the highest accuracy)*
- *No accumulation of chip on the table (swivel table)*
- *Swivelling axis A and rotary axis C are located within the workpiece (U-shape)*
- *Torsion prevented by tandem drive*
- *Wide spacing between the A axis flanges results in very large collision circle*
- *High swivelling range for undercuts*

Torque table

- *High dynamics*
- *No wear*
- *Direct, absolute measuring system*

DRIVE TECHNOLOGY

- *Central table load*
- *Drive directly on table housing = low torsion A axis*
- *Direct, absolute measuring system*
- *Good maintenance accessibility*
- *A axis integrated in machine bed*

Tandem drive

- *Mechanical tandem drive to left and right of table housing*



NC swivelling rotary table

C-axis drive type: torque



The "Torque" NC swivelling rotary table provides the ideal conditions for highly dynamic 5-axis and simultaneous 5-axis machining.



Clamping surface:	Ø 900
T grooves:	parallel 7 / 18 H7
Swivelling range:	+/- 130°
C-axis drive type:	Torque
Speed - rotary axis C:	30 rpm
Speed - swivelling axis A (tandem drive):	15 rpm
Max. table load:	2500 kg



Zero-point clamping systems / pallet clamping systems



Clamping surface:	Ø 1350 x 1100
T grooves:	parallel 11 / 22 H7
Swivelling range:	+/- 130°
C-axis drive type:	Torque
Speed - rotary axis C:	30 rpm
Speed - swivelling axis A (tandem drive):	15 rpm
Max. table load:	2500 kg

NC swivelling rotary table . MT

C-axis drive type: torque



Zero-point clamping systems / pallet clamping systems

Clamping surface:	Ø 1200
T grooves:	star 16 / 22 H7
Swivelling range:	+/- 130°
C-axis drive type:	Torque
Speed - rotary axis C:	400 rpm
Speed - swivelling axis A (tandem drive):	15 rpm
Max. turning table load:	1500 kg
Max. milling table load:	2500 kg

02.6 Spindles




The C 62 features compact spindles. All the spindles can be replaced easily and quickly during servicing. With the different speed ranges and tool holding fixtures the spindles are suitable for a wide range of machining tasks. Like the tables, all spindles are manufactured exclusively and entirely at our plant in Gosheim.

TECHNICAL DATA

- High-tech spindles for demanding milling processes
- Slim-end spindle for machining deep cavities
- Few projecting edges (prevention of collision)


Spindle 12000 rpm . MT

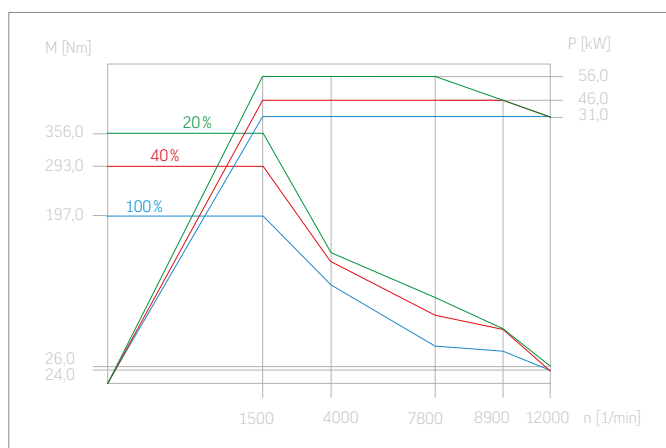

Maximum spindle speed:	12000 rpm
Main Power 20% c.d.f.:	56 kW
Torque 20% c.d.f.:	356 Nm
Tool holding fixture:	HSK A 100 / HSK T 100
Spindle:	compact




Spindle 18000 rpm . MT

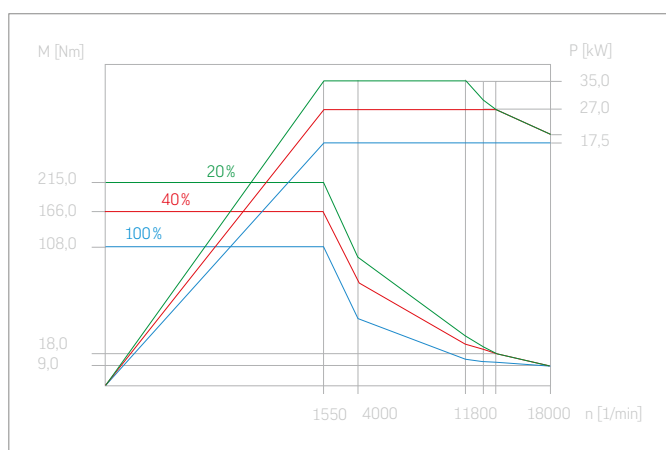

Maximum spindle speed:	18000 rpm
Main Power 20% c.d.f.:	35 kW
Torque 20% c.d.f.:	215 Nm
Tool holding fixture:	HSK A 63 / HSK T 63
Spindle:	compact




Spindle 9000 rpm

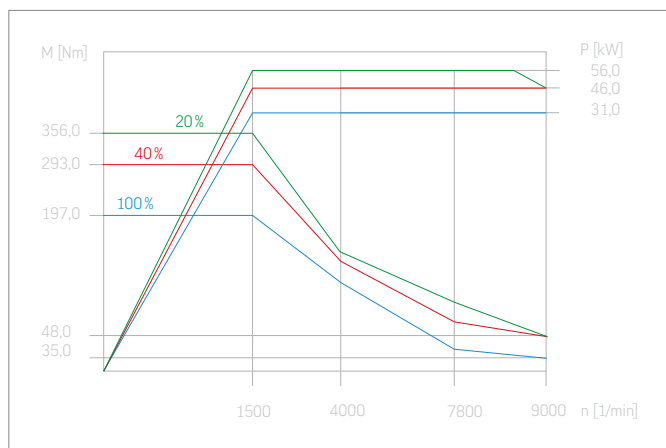


Maximum spindle speed: 9000 rpm
 Main Power 20% c.d.f.: 56 kW
 Torque 20% c.d.f.: 356 Nm
 Tool holding fixture: SK 50
 Spindle: compact

Spindle 9000 rpm

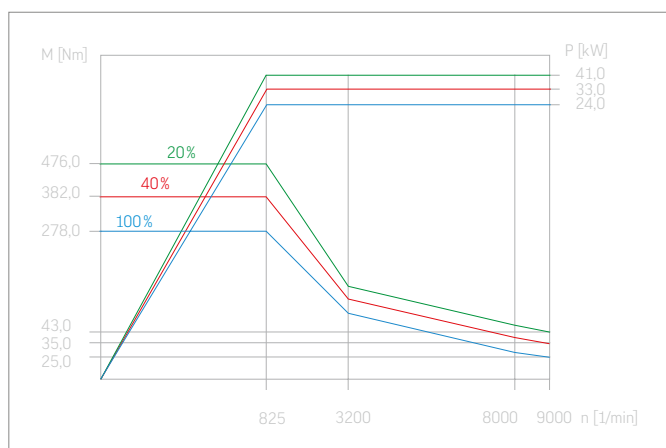


Maximum spindle speed: 9000 rpm
 Main Power 20% c.d.f.: 41 kW
 Torque 20% c.d.f.: 476 Nm
 Tool holding fixture: HSK A 100
 Spindle: compact

Spindle 10000 rpm

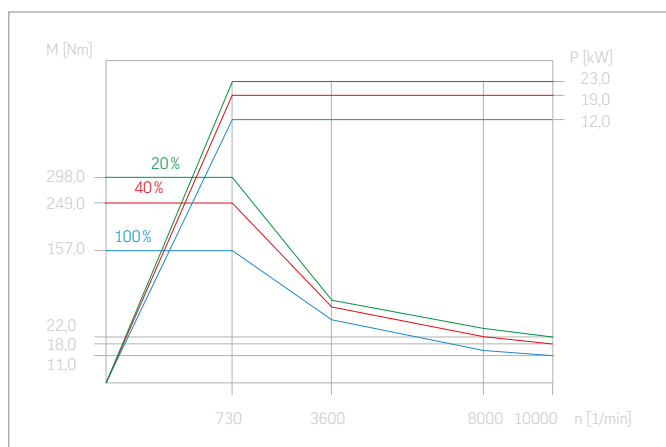


Maximum spindle speed: 10000 rpm
 Main Power 20% c.d.f.: 23 kW
 Torque 20% c.d.f.: 298 Nm
 Tool holding fixture: HSK A 63
 Spindle: compact

Spindle 12000 rpm

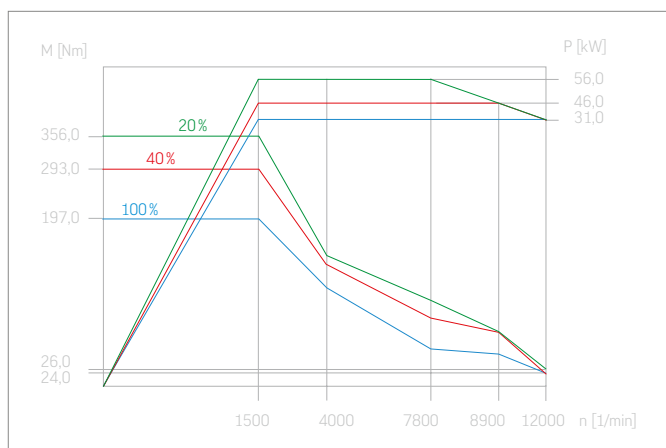


Maximum spindle speed: 12000 rpm
 Main Power 20% c.d.f.: 56 kW
 Torque 20% c.d.f.: 356 Nm
 Tool holding fixture: HSK A 100
 Spindle: compact

Spindle 15000 rpm

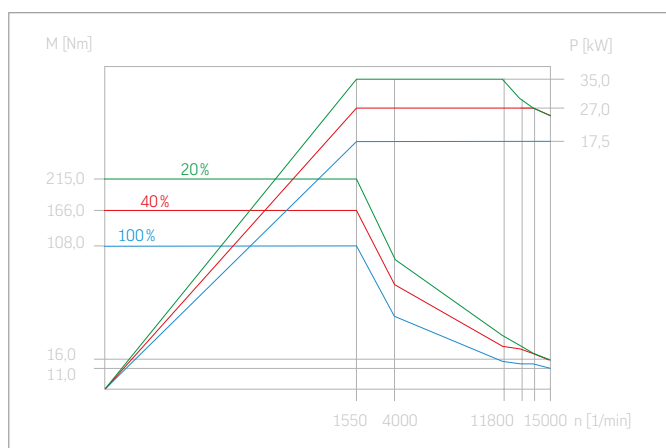

Maximum spindle speed: 15000 rpm
 Main Power 20% c.d.f.: 35 kW
 Torque 20% c.d.f.: 215 Nm
 Tool holding fixture: SK 40
 Spindle: compact

Spindle 18000 rpm

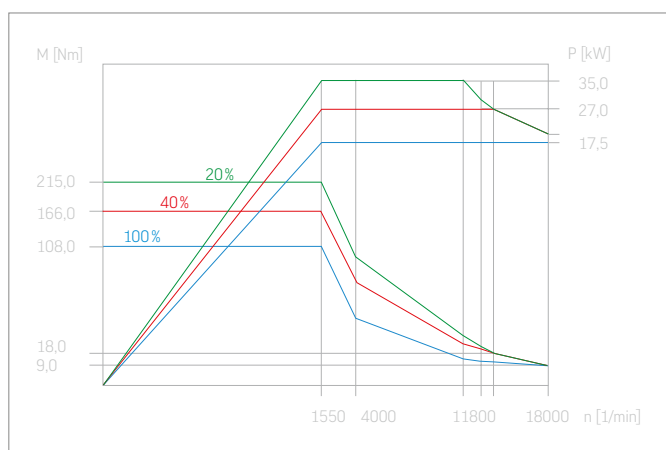


Maximum spindle speed: 18000 rpm
 Main Power 20% c.d.f.: 35 kW
 Torque 20% c.d.f.: 215 Nm
 Tool holding fixture: HSK A 63
 Spindle: compact



02.7

The magazine

The C 62's tool magazine holds up to 70 tools in the standard version and is integrated into the machine bed to save space. On the rear of the machine is the ground-level tool loading point with operator control panel. The integrated tool lift transports the tools quickly and easily to the elevated ring magazine.

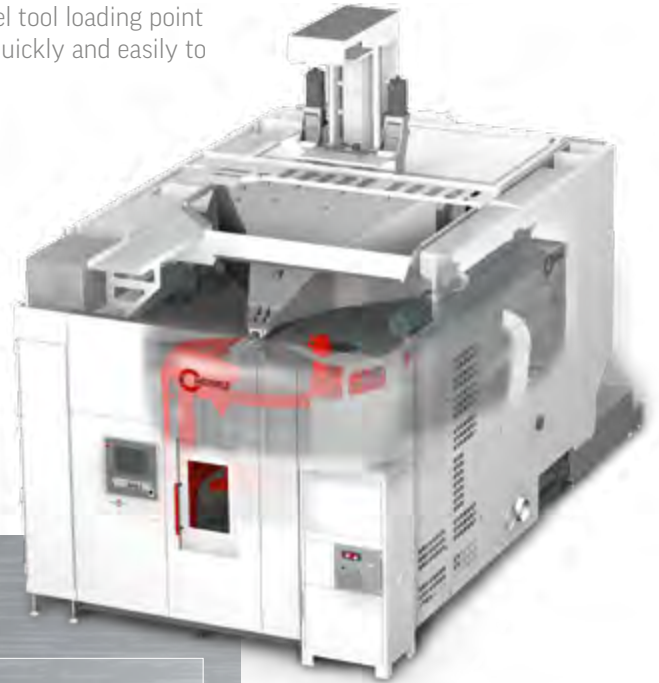

TECHNICAL DATA

Pick-up magazine

Integration into the machine bed

Excellent accessibility

Additional control panel next to tool loading point

Covers for tool holding fixturea

Ground-level tool loading point with integrated tool lift to standard magazine

Tool changer (pick-up)


Interface:	SK 40 / HSK A 63	HSK A 50 / HSK A 100
Interface MT:	HSK T 63	HSK T 100
Magazine pockets:	70	50
Max. tool weight:	15 kg	30 kg
Max. tool diameter:	Ø 160 mm	Ø 250 mm
Max. tool length:	500 mm	500 mm
Max. magazine load:	560 kg	550 kg
Chip-to-chip time*:	9.5 s	9.5 s

*(chip-to-chip times for 3-axis units in milling mode calculated in keeping with German standard VDI 2852, page 1)

Additional magazine

The Hermle additional magazine, in octagonal design, for space-optimised expansion of the tool storage capacity. Adjustable feet with integrated transport rollers facilitate attachment to the Hermle machining centre C 62. The additional magazine is available as a single or double version.

Additional magazine single

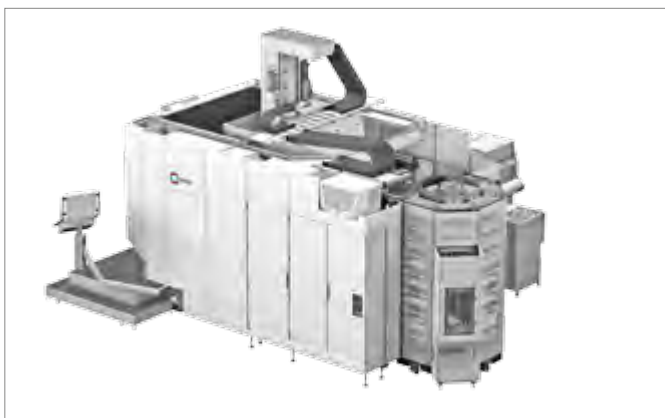

Additional magazine double



HIGHLIGHTS

Only 3 m² footprint

*Up to 325 tool pockets
(depending on the interface)*

*Loading and unloading position
with 2 x 2 or 2 x 3 tool pockets
(depending on the interface)*

With an additional control panel

*Adjustable feet with integrated
transport rollers*

*Two magazines that can
be combined*



02.8

Control unit

The C 62 can be used with two control types. Both controls offer various program functions. Hermle simplifies programming and operation still further with comprehensive extra features.

Heidenhain

Milling and turning using one control unit

Heidenhain TNC 640

- Dynamic Efficiency – Active Chatter Control (ACC), Adaptive Feed Control (AFC), trochoidal milling
- Dynamic Precision – Cross Talk Compensation (CTC), Active Vibration Damping (AVD)
- Further special turning cycles are integrated such as roughing, finishing, grooving and threading
- Easy to switch from milling to turning mode
- 19" TFT colour flat screen
- Keyboard unit with full keyboard, integrated trackball, USB and Ethernet interfaces
- Fully digital with HSCI interface and EnDat interface
- Programming in Heidenhain plain text or per DIN/ISO
- Standard drilling and milling cycles
- Touch probe system cycles
- Free contour programming
- Special functions for fast 3D machining
- Automatic calculation of cutting data
- Software option Kinematic Opt (Measurement cycle for improving accuracy of rotational and swivelling operations)



For further advantages and detailed technical data, please see the Heidenhain brochures.

Siemens

Milling and turning using one control unit

Siemens S 840 D sl

- 19" TFT colour flat screen
- Keyboard unit with full keyboard, additional panel with integrated trackball, key-operated switch and buttons
- USB and Ethernet interfaces
- Complete and flexible diagnostics and service concept
- Including shell transformation, 5-axis transformation and process-oriented measuring
- Incl. software option Kinematic Opt (Measurement cycle for improving accuracy of rotational and swivelling operations)
- Tool management for all machines: HOTS
- The S 840 D sl is also equipped for turning mode and can handle all integrated milling and turning processes
- Operate user interface



For further advantages and detailed technical data, please see the Siemens brochures.



02.8

Control unit

Hermle control tools



Hermle "Tool-Management-Control"

Simple, Hermle tool management for Heidenhain controls.



Hermle "Information-Monitoring-Software"

The „Information-Monitoring-Software“ is used to display the live status of machines and send events via e-mail.



Hermle "Operate-Tool-System"

Simple, Hermle tool management for the Siemens S 840 D sl.



Hermle "Wear-Diagnosis-System"

Machine status is continually monitored by the Hermle wear diagnosis system. It facilitates rapid machine diagnostics and status-oriented detection of maintenance tasks.



Hermle "Automation-Control-System"

Simple, Hermle pallet management software.

Hermle setups

Standard

Standard

- Standard setting.
- Switches back to the standard setting after a different setup has been used.

Heavy duty machining

Heavy duty machining

- For roughing in conjunction with high milling power.
- Greater machining performance possible thanks to reduced machine vibration (depending on the tool and the selected technology data).

High production

Production

- Quicker machining with programs which have many cycle calls or subprograms.



[illegible]

3D path smoothing

3D path smoothing

- For very high demands on the surface quality, mainly for free-form surfaces.



02.9

The details

The C 62 is built using an elegant cassette panel construction. This high-tech building block concept is used throughout from the standard machine to the flexible manufacturing system. The machining centre can be transported without any disassembly and set up without a foundation. Furthermore, all units are arranged for easy maintenance and servicing.



Chip conveyor



Chip conveyor with internal cooling lubricant supply

HIGHLIGHTS

Comprehensive fluid technology

Optimised chip management

Diverse cooling lubricant units

We provide the correct method of chip removal from the working area for all kinds of chip



Chip conveyor with internal cooling lubricant supply and recooling unit



Chip conveyor with internal cooling lubricant supply, recooling unit and emulsion mist extraction

03

Technical data . C 62



03.1

Technical data . C 62

Working area	Traverse	X axis	1200 mm
	Traverse	Y axis	1300 mm
	Traverse	Z axis	900 mm
	Rapid linear traverses	X-Y-Z	50 m/min
	Linear acceleration	X-Y-Z	6 m/s ²
	Linear feed force	X-Y-Z	16000 N
	Max. vertical table clearance		1100 mm
	Max. workpiece diameter		Ø 1200 mm
	Max. workpiece height		900 mm
	Collision circle (A axis) in 0° position		Ø 1400 mm
Main spindle drive	Speed	9000 rpm	SK 50 ○
	Main power/Torque	20% c.d.f.	56 kW / 356 Nm
	Speed	9000 rpm	HSK A 100 ○
	Main power/Torque	20% c.d.f.	41 kW / 476 Nm
	Speed	10000 rpm	HSK A 63 ○
	Main power/Torque	20% c.d.f.	23 kW / 298 Nm
	Speed	12000 rpm	HSK A 100 ○
	Main power/Torque	20% c.d.f.	56 kW / 356 Nm
	Speed	15000 rpm	SK 40 ●
	Main power/Torque	20% c.d.f.	35 kW / 215 Nm
Control unit	Speed	18000 rpm	HSK A 63 ○
	Main power/Torque	20% c.d.f.	35 kW / 215 Nm
	Speed (MT variants)	12000 rpm	HSK A 100 / HSK T 100
	Main power/Torque	20% c.d.f.	56 kW / 356 Nm
	Speed (MT variants)	18000 rpm	HSK A 63 / HSK T 63
	Main power/Torque	20% c.d.f.	35 kW / 215 Nm
Control unit	Heidenhain		TNC 640 ●
	Siemens		Sinumerik 840 D sl ○

Tool changer (pick-up)	Interface	SK 40 / HSK A 63 / HSK T 63		SK 50 / HSK A 100 / HSK T 100		○
	Magazine pockets	70		50		
	Chip-to-chip time*	approx. 9.5 s		approx. 9.5 s		
	*(chip-to-chip times for 3-axis units in milling mode calculated in keeping with German standard VDI 2852, page 1)					
	Max. tool length	500 mm		500 mm		
	Max. tool diameter	Ø 160 mm		Ø 250 mm		
	Max. magazine load	560 kg		550 kg		
Extension of tool storage capacity*	Interface / Interface MT		additional magazine		max. magazine load	
		single	double	single	double	
	SK 40	ZM 90 / ZM 115	ZM 220 / ZM 270	90 / 115	220 / 270	
	SK 50	ZM 72 / ZM 92	ZM 176 / ZM 216	72 / 92	176 / 216	
	HSK A 63 / HSK T 63	ZM 110 / ZM 135	ZM 265 / ZM 325	110 / 135	265 / 325	
	HSK A 100 / HSK T 100	ZM 88 / ZM 108	ZM 212 / ZM 260	88 / 108	212 / 260	
*The tool length depends on the use of the magazine and is at max. 500 mm. More details on request.						
Table variants*	NC swivelling rotary table	Ø 900	Ø 1350	Ø 1200 (MT variant)		
	Clamping surface	Ø 900 mm	Ø 1350 mm	Ø 1200 mm		
	Clamping surface flattened on 2 sides	-	1100 mm	-		
	Swivelling range	+/- 130°	+/- 130°	+/- 130°		
	C-axis drive mode	torque	torque	torque		
	Speed - swivelling axis A	15 rpm	15 rpm	15 rpm		
	Speed - rotary axis C	30 rpm	30 rpm	400 rpm		
	Max. milling table load	2500 kg	2500 kg	2500 kg		
	Max. turning table load	-	-	1500 kg		
	T grooves parallel	7 units / 18 H7	11 units / 22 H7	-		
	T grooves star				16 units / 22 H7	

*All tables available on demand


● Included in standard delivery

○ Available upon request

Positional tolerance	Tp in X-Y-Z axes according to VDI/DGQ 3441	0.008 mm	●
	(calculated at a constant ambient temperature of 20 °C +/-1 °C. Our products are subject to the German Export Law and require authorization since the attainable precision may be less/greater than 6 µm.)		
Chip conveyor	Scraper belt conveyor		●
	Hinged belt conveyor		○
	Chip conveyor ejection height	1100 mm	
	Chip cart	450 l	○
Coolant equipment	Amount of coolant	600 l	●
	Pump capacity	5 bar / 80 l/min	
Internal cooling lubricant supply with paper band filter	Amount of coolant	1700 l	
	Pressure (manually adjustable up to)	max. 80 bar / 47 l/min	
	Mains connection (ICS)	400 V / 50 Hz	
	Power consumption (ICS)	24.8 kVA	
Hydraulics	Operating pressure	120 bar	●
Central lubrication	Minimum grease lubrication quantity		●
Weight	(Standard version without optional extras, attachments, workpieces and cooling lubricant)	Approx. 30.0 t	
Connected loads	Mains connection	400 V / 50 Hz	
	Power consumption C 62 U	78 / 90 kVA	
	Power consumption C 62 U MT	90 / 104 kVA	
	Compressed air	6 bar	

● Included in standard delivery


○ Available upon request

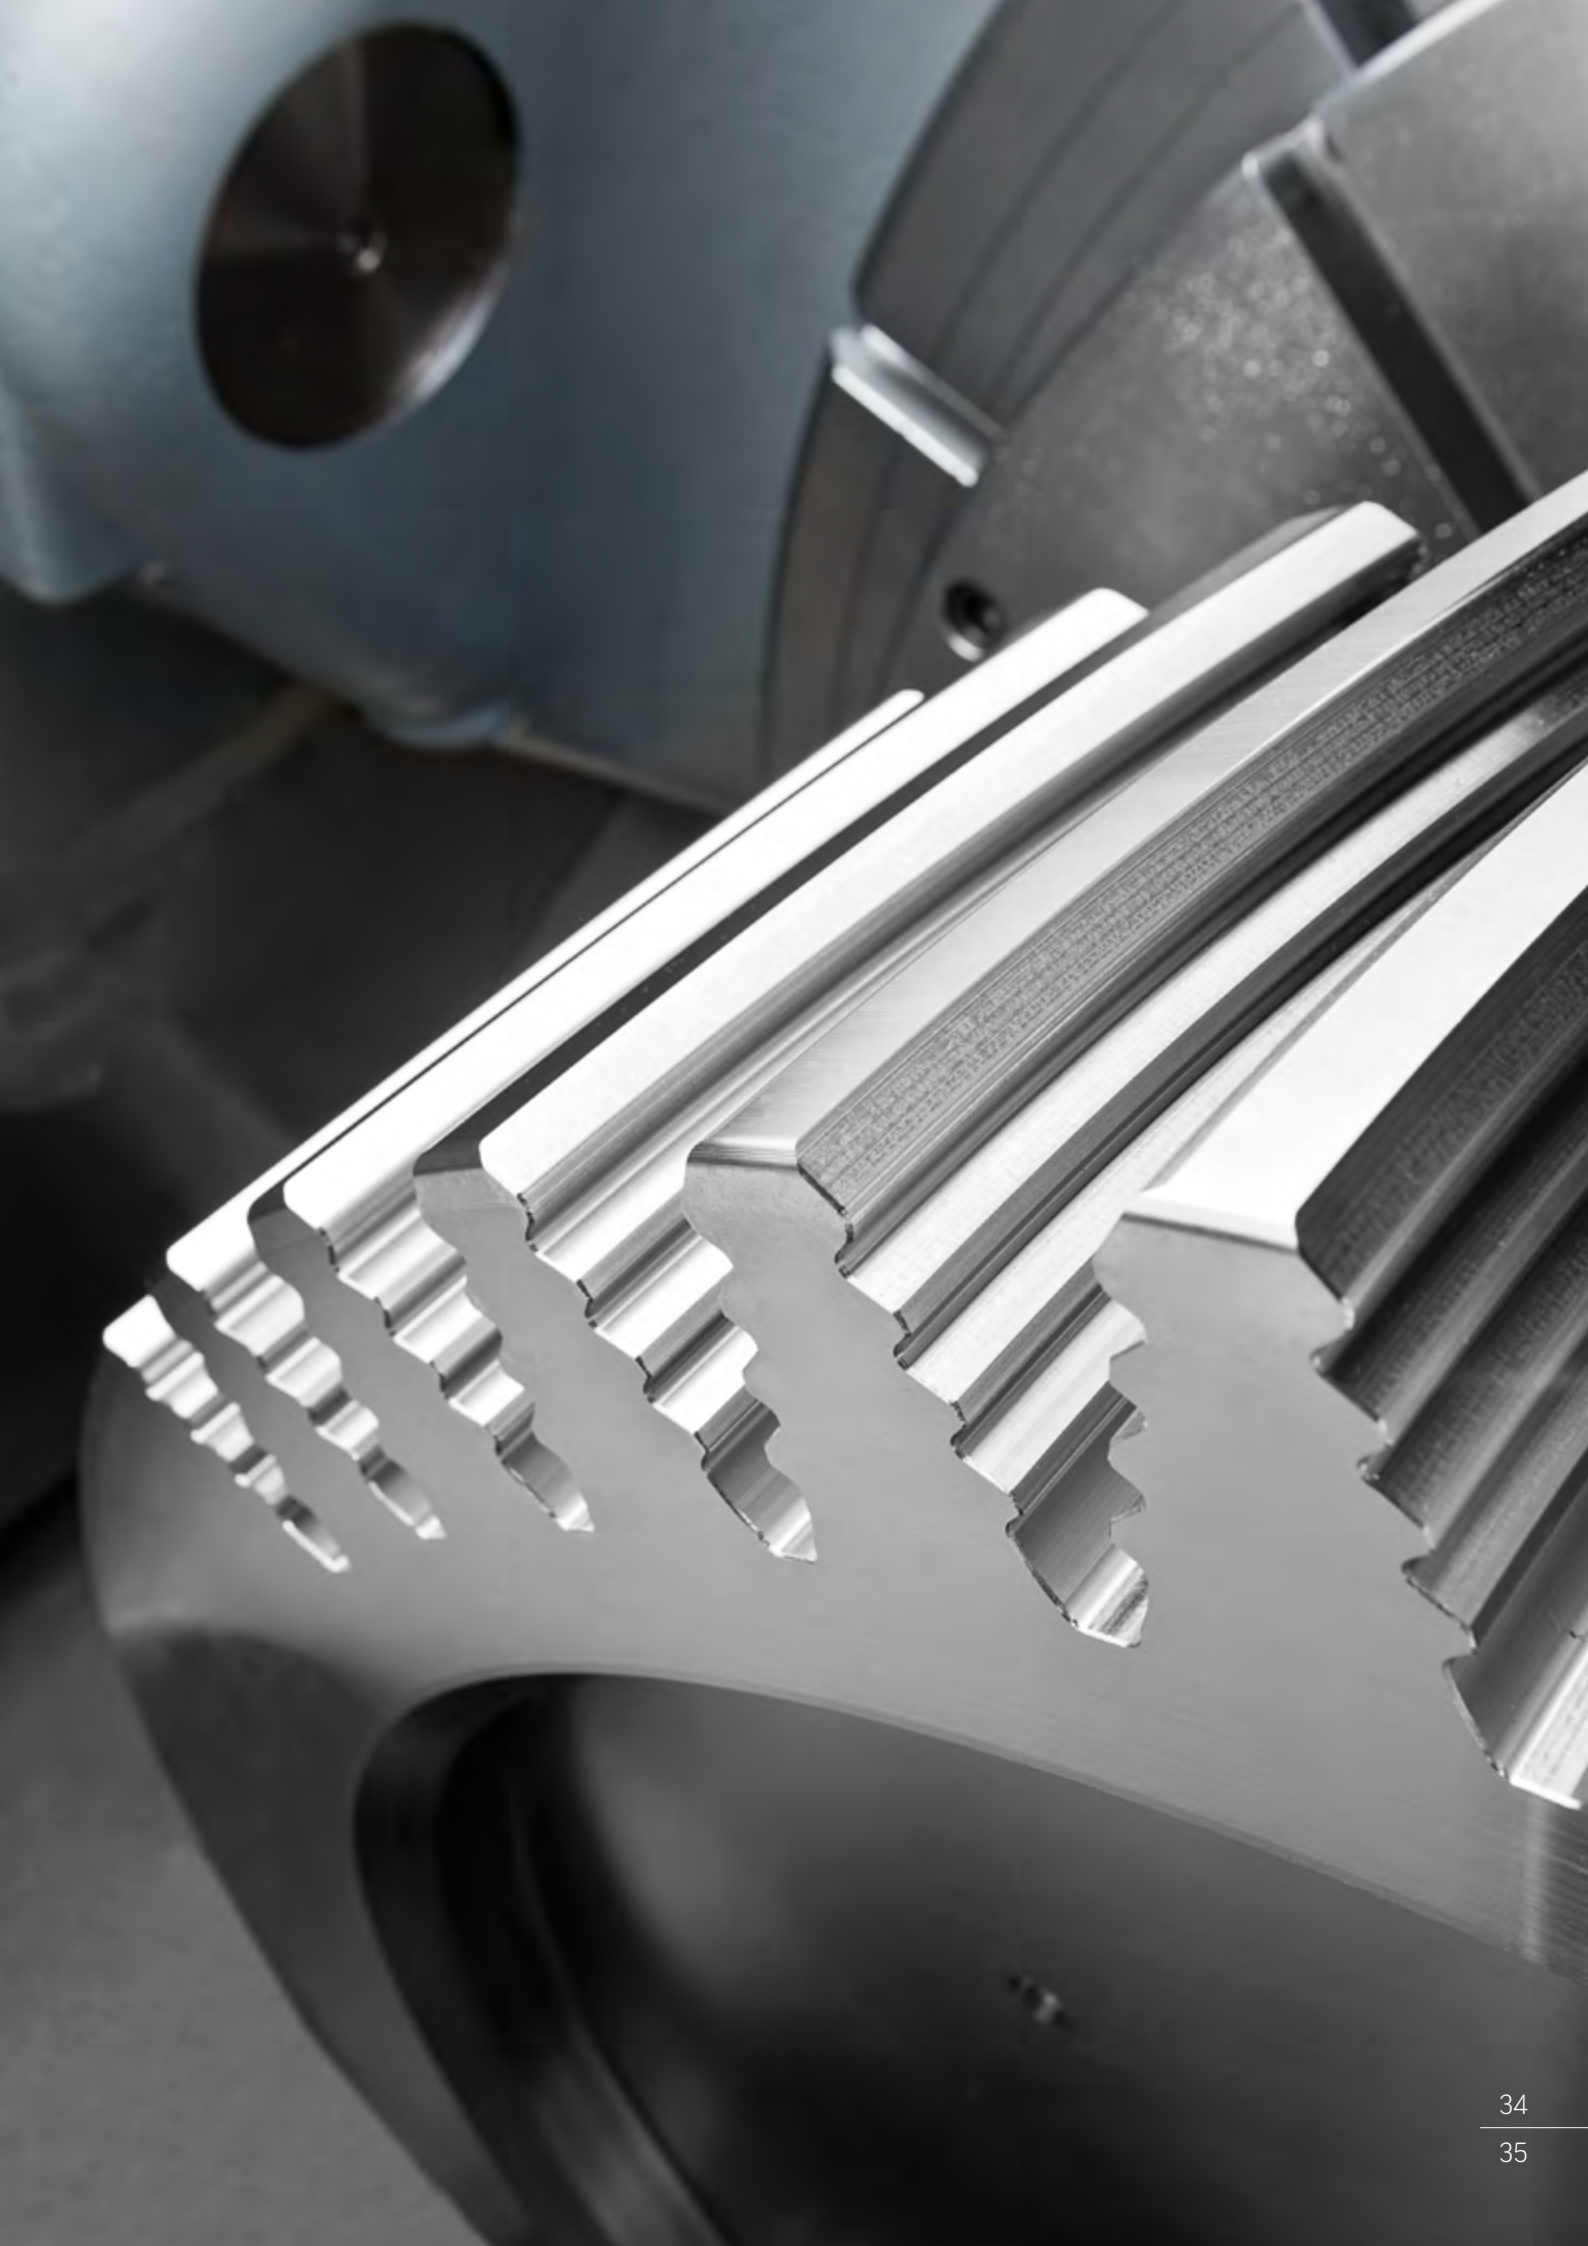


03.2 Options

The C 62 is prepared for anything: Numerous optional extras make machining even more efficient and powerful in real applications and enable you to optimise your work with the machining centre still further.

C 62 U MT dimensions

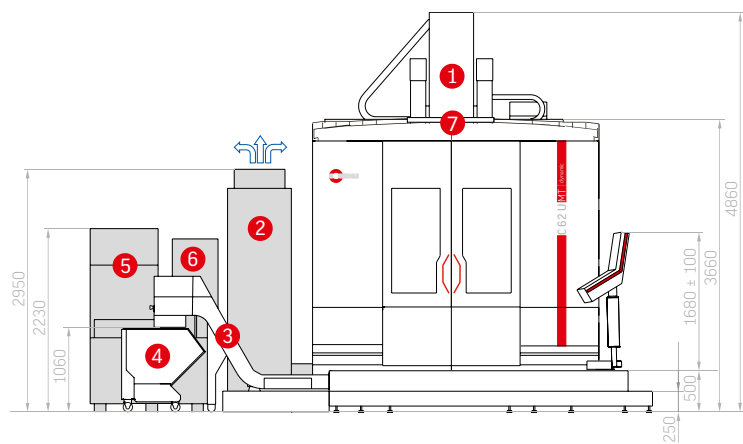


- 1 Machine
 - 2 Emulsion mist extraction
 - 3 Chip conveyor
 - 4 Chip cart
 - 5 Internal cooling lubricant supply
 - 6 Recooling unit
 - 7 Reinforced cabin roof
- C 62 U MT

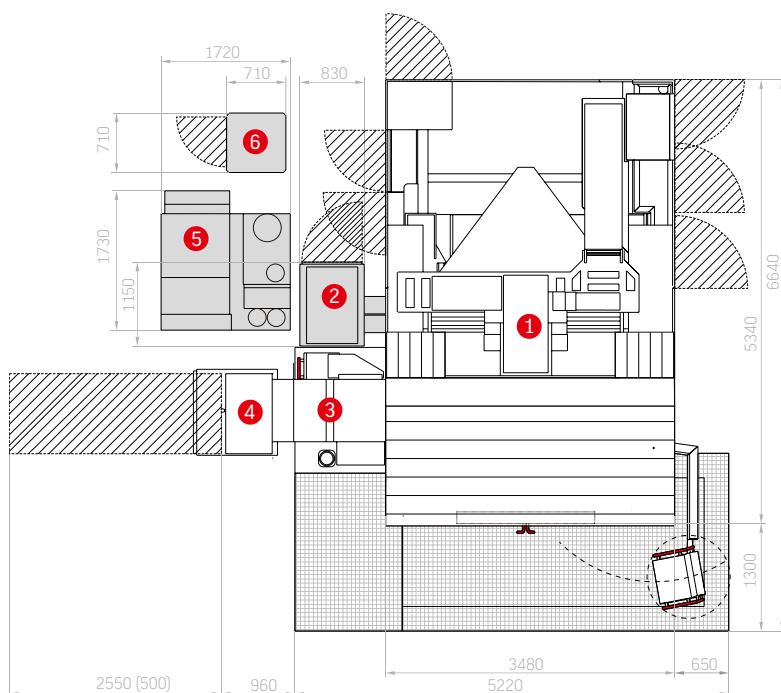


Options

- | | | | |
|---|-------------------------------------|-------------------------------|--|
| - Automatic cabin door | - Elec. hand-held control module | - Pallet changer | - Preparation button |
| - Minimum quantity lubrication external | - Elec. heat compensation | - Rotating transparent window | - Tool breakage monitoring/measurement |
| - BDE signal | - Emulsion mist extraction | - Recooling unit | - Additional magazine |
| - Control panel height adjustable | - Internal cooling lubricant supply | - Chip conveyor | |
| - Blow air through spindle centre | - Touch probe incl. preparation | - Coolant nozzle | |
| - Rotary feedthrough | - Pallet storage | - Chip cart | |
| | | - Air purge for linear scales | |
| | | - Status lamp | |

C 62 U dimensions . Additional magazine single / double

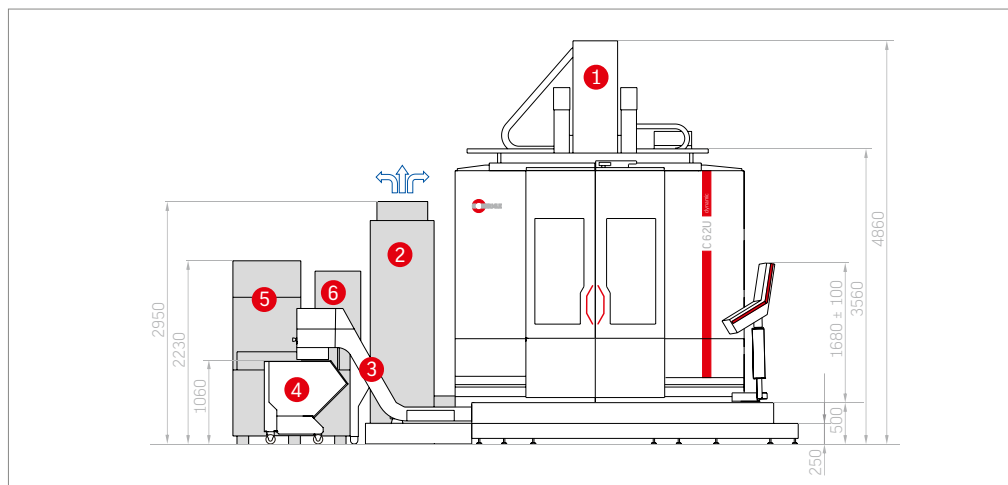

- 1 Machine
- 2 Emulsion mist extraction
- 3 Chip conveyor
- 4 Chip cart
- 5 Internal cooling lubricant supply
- 6 Recooling unit
- 8 Additional magazine single
- 9 Additional magazine double

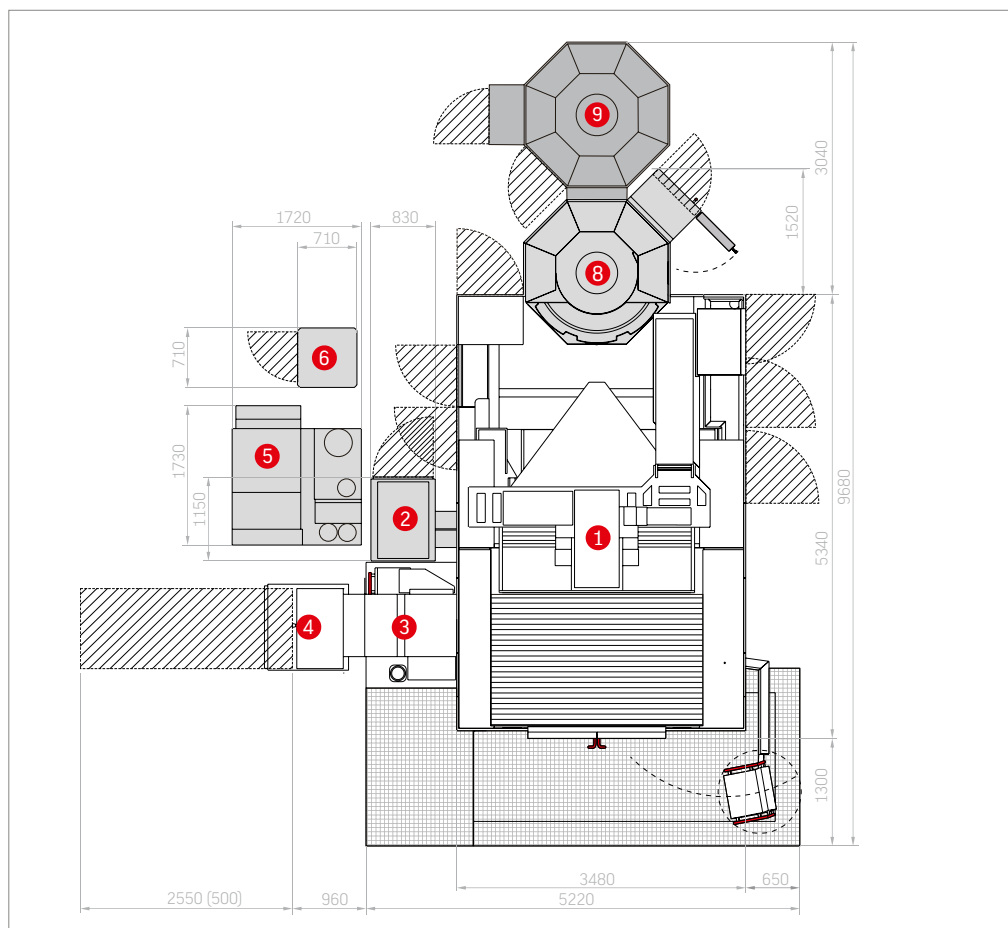

04 Automation







04.1


Automation . C 62

Our pallet changer is setting new standards for parallel setup in our highly dynamic machining centres. A further increase in productivity allows for more adaptable storage systems. Machining centres can be set up via pallet storage for production-oriented machine runs with minimum operator interference/without operator interference or for customer-specific runs using a wide range of parts. Furthermore, multiple machining centres can be linked to form a complete manufacturing system.

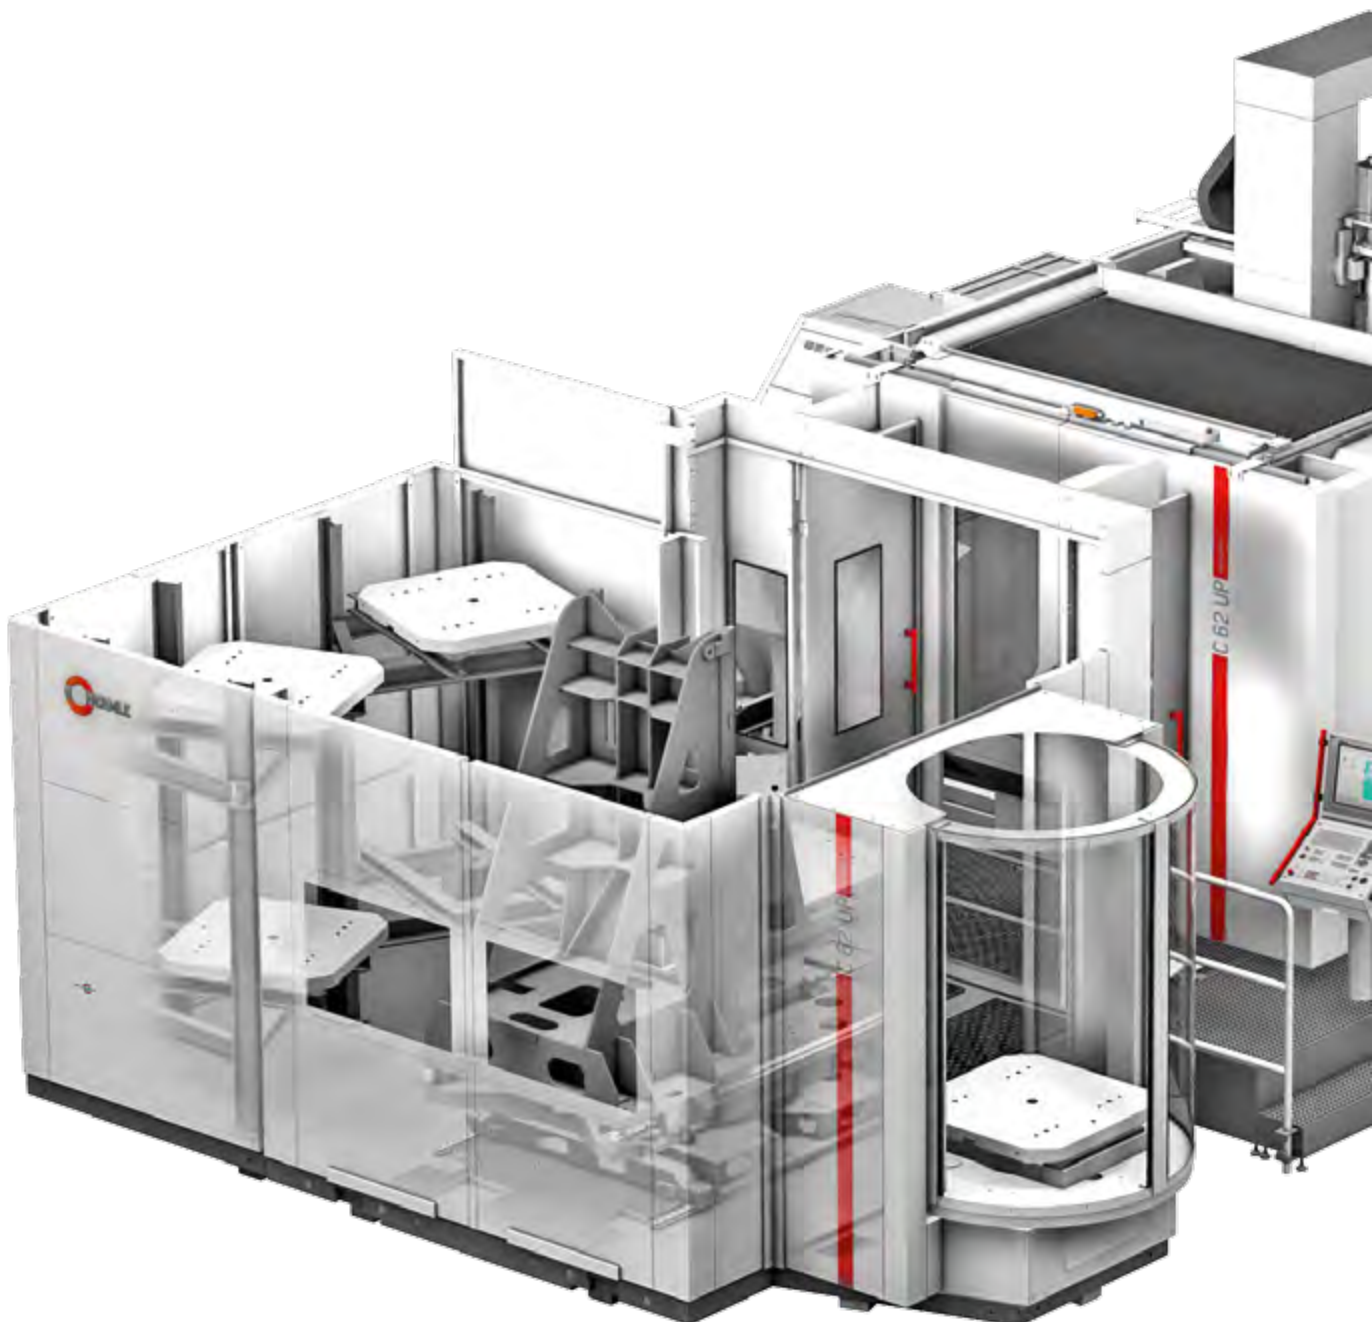


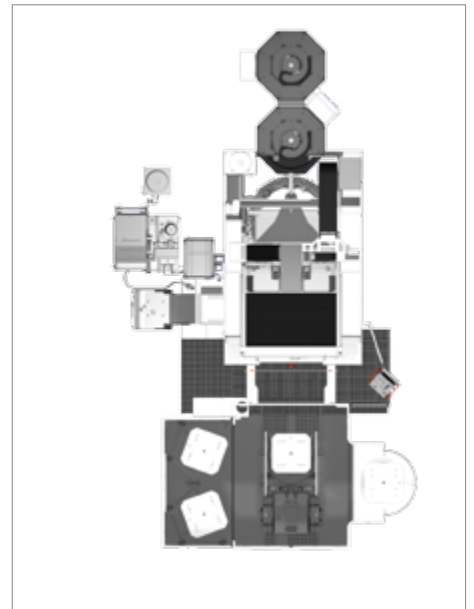

Pallet changer PW 3000 with one 2/4-pallet storage module and setup station module, right

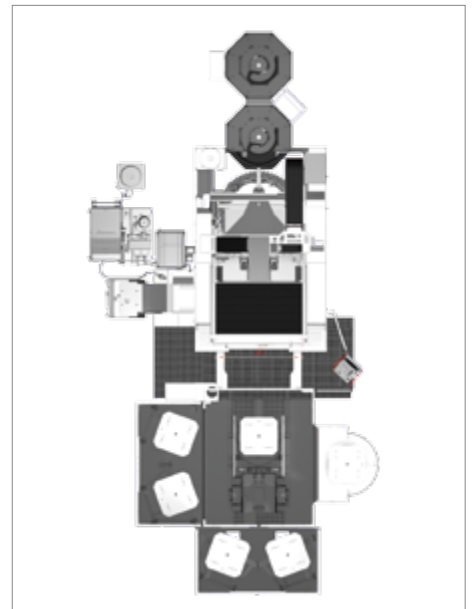

Pallet changer PW 3000 with two 2/4-pallet storage modules and setup station module, right

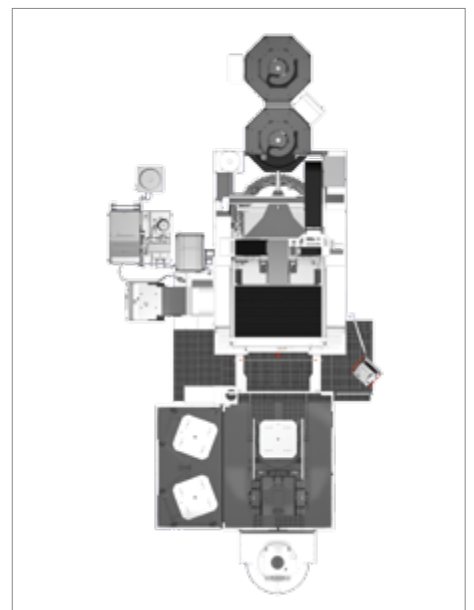

Pallet changer PW 3000 with one 2/4-pallet storage module and setup station module, front

The pallet changer PW 3000 is modular in design. The storage and setup station modules can be configured to adapt to specific positions and quantities.

05 Precision



PRECISION IN EVERY DIMENSION: Hermle has a thorough understanding of the requirements for manufacturing high-precision machining centres for processing smaller and larger workpieces of up to 2.5 t in weight. For this reason, "The Original" only uses German machines for production and materials from European suppliers.

Furthermore, the entire machining production department is fully air conditioned and kept clean by a central swarf disposal system.

Hermle machining centres have also been thoroughly tested by intensive endurance tests and in manufacture-oriented machining processes in our own machining manufacturing department. Our meticulous manufacturing processes allow Hermle to set new precision standards which undercut those demanded by the DIN/ISO 10791 standard in every way.

At Hermle, we distinguish between positioning precision (accuracy with which a certain position within the working area can be pinpointed on one axis) and geometric precision.

The latter is significant for the precision of the entire machine – it encompasses the following factors:

- Positioning of linear and rotary axes
- Straightness and angular deviation of the linear axes
- Rectangularity and parallel alignment of all axes to one other
- Concentricity and axial run-out of the table
- Concentricity of the working spindle

The precision of Hermle machining centres originates during mechanical production and is not produced by subsequent electronic compensation. This further improves the precision of the individual axes (precision package 1 and 2).



PRECISION LEVELS

Hermle standard:

X-Y-Z: Positional uncertainty $P \leq 8 \mu$
 A: Positional uncertainty $P \leq 8''$
 C: Positional uncertainty $P \leq 8''$

Hermle improved precision*:

X-Y-Z: Positional uncertainty $P \leq 5 \mu$
 A: Positional uncertainty $P \leq 6''$
 C: Positional uncertainty $P \leq 6''$

*To achieve improved precision, components must be selected with care. Tolerances must also be taken into account whilst the machine is still being constructed. Hermle also recommends the HSK-A 63 tool holding fixture, electr. heat compensation, an ICS recooling unit and two-sided A axis drive. Test and operating conditions are as follows: air conditioned room ($+20^\circ\text{C}$, $\pm 2^\circ\text{C}$) and temperature fluctuation of only 0.5°C in one hour or max. 2°C within 24 hours.

IMPROVED PRECISION PACKAGES


Precision package 1 (linear axes X, Y, and Z)

- Straightness optimisation
- Geometry adjustment and optimisation
- Straightness measurement
- X, Y, Z positioning accuracy Pos. tolerance $\leq 5 \mu$
- Laser measurement according to VDI/DGQ 3441 or ISO 230-2

Precision package 2* (rotary axes A and C)

- Table geometry
- Axial run-out bearings
- C axis position
- Adjustment of complete table
- Position of A and C axes relative to basic geometry
- Indexing precision A $6''$
- Indexing precision C $6''$
- Laser measurement according to VDI/DGQ 3441 or ISO 230-2

*not available for pallet changer and MT variant

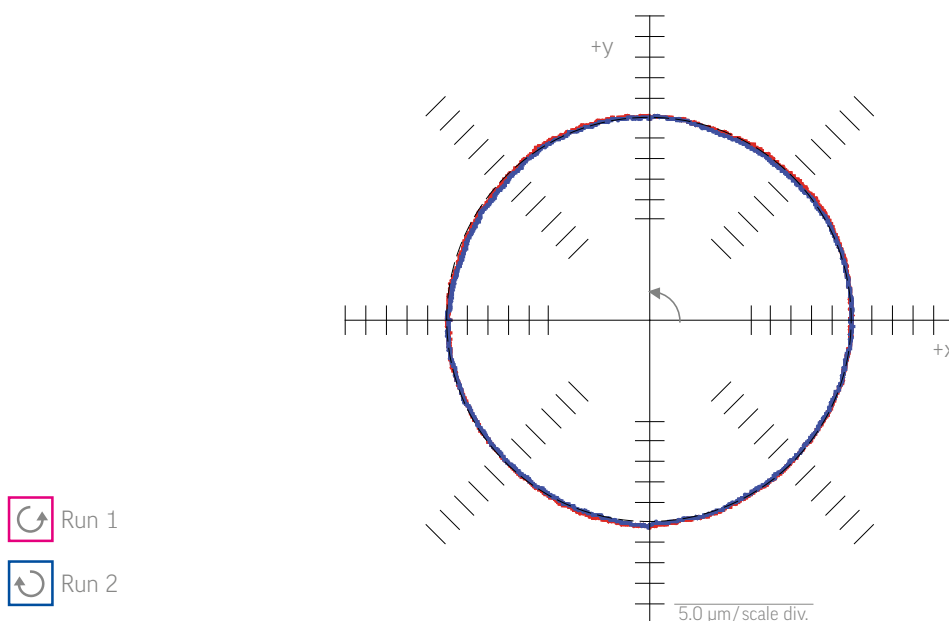

06

Energy efficiency

Both manufacturer and customer benefit from efficient production processes. Therefore, Hermle has focused on integrated resource sustainability and energy efficiency for many years. We can rightly claim pioneer status in the Blue Competence initiative founded by the VDW (German Machine Tool Builders Association).

From development to low-energy manufacturing (with a high level of in-house production) to the operation of CNC machining centres – Hermle has stood for a principle of sustainable environmental protection combined with economic considerations for many years. Energy recovery is just one of the advantages enjoyed by our customers.

BLUECOMPETENCE

Machine Tools



EFFICIENT MANUFACTURING

We use energy efficient manufacturing methods not because it is the current trend or because it is required of us, but on principle. And we always have.

Low energy component manufacture

- Mineral casting technology
- Lightweight construction

*Virtual machine optimisation /
machine development*

*Reduction in the energy required for transport
through:*

- High levels of in-house production
- Just one production plant
- Locally sourced components
and materials
- No material tourism

High-quality, high-efficiency components

- Ball screws
- Guideways
- Antifriction bearing etc.

EFFICIENT OPERATION

*Our machining centres are energy efficient both during
their manufacture and during operation.*

*Energy recovery has been standard
at Hermle for over 20 years*

High quality servo axes

*Ideal drive design for
the respective application*

*Demand-based cooling technology
both for dimensioning and
in application*

*De-energize system:
Up to 80% less energy consumption
in stand-by mode*

Very long machine service life

07 Services


The perfection we insist on for the development and production of our machines is also mirrored by our service department. Our service team provides more than just spare parts and rapid response support within hours. At Hermle, we see ourselves as a comprehensive service provider which provides customers with numerous benefits.

Alongside standard services, these include:

- Our superior, cost-effective, practical and flexible training programs carried out by sales representatives directly at the customers' premises.
- Our continual pursuit of optimization and perfection. Our motto – those who stop improving today will not make the grade tomorrow.
- Intensive expert consultation on milling in general, programming and handling of our products.
- Our application technicians who are experts in machining processes and who are quick to assist and advise our customers.








Maschinenfabrik
Berthold Hermle AG
Industriestraße 8-12
D-78559 Gosheim

Phone +49 (0)7426 95-0
Fax +49 (0)7426 95-1309

info@hermle.de
www.hermle.de



Subject to technical modifications. 04/16/C62/1500/EN/ST



The machining examples used in this leaflet are published with the explicit and kind permission of our customers. The information in this brochure only contains general descriptions and/or performance features that, in a concrete application, may not always apply in the form described or represented here or may have changed due to further development of the products. The performance features desired shall only be binding if they have been expressly agreed upon in writing at the time of the contract. The machines illustrated may include some options, accessories and control unit alternatives.